

The logo for SWCA is positioned vertically on the left side of the page. It consists of the letters 'S', 'W', 'C', and 'A' stacked vertically in a large, light blue, serif font.

# Noise Technical Report Rancho Viejo Solar Project

Santa Fe County, New Mexico

JULY 2024 (REVISED NOVEMBER 2024)

PREPARED FOR

**Rancho Viejo Solar, LLC**

PREPARED BY

**SWCA Environmental Consultants**



**NOISE TECHNICAL REPORT  
RANCHO VIEJO SOLAR PROJECT  
SANTA FE COUNTY, NEW MEXICO**

Prepared for

**Rancho Viejo Solar, LLC**  
282 Century Place, Suite 2000  
Louisville, Colorado 80027

Prepared by

**SWCA Environmental Consultants**  
20 East Thomas Road, Suite 1700  
Phoenix, Arizona 85012  
[www.swca.com](http://www.swca.com)

July 2024 (Revised November 2024)

## CONTENTS

<b>1</b>	<b>Introduction .....</b>	<b>1</b>
1.1	Project and Study Description .....	1
1.2	Sound Fundamentals – Background .....	4
1.2.1	Definition of Acoustical Terms .....	4
1.2.2	Sound Levels of Representative Sounds and Noises .....	4
<b>2</b>	<b>Existing Conditions .....</b>	<b>5</b>
2.1	Existing Land Use and Site Conditions .....	5
2.2	Existing Sound Conditions .....	6
2.2.1	Existing Sound Levels .....	6
2.3	Regulatory Setting .....	6
2.3.1	Applicable Noise Standards .....	6
<b>3</b>	<b>Noise Impacts .....</b>	<b>9</b>
3.1	Noise Assessment Components .....	9
3.2	Construction Noise .....	9
3.2.1	Equipment and Machinery .....	10
3.3	Operational Noise .....	11
3.3.1	Operational Activities .....	11
3.3.2	Noise Profile .....	11
3.3.3	Assessment Methodology .....	12
3.3.4	Operational Noise Impacts .....	13
<b>4</b>	<b>Literature Cited .....</b>	<b>15</b>

## Appendices

Appendix A: Project Operation Noise Maps

## Figures

Figure 1. Project vicinity map .....	2
Figure 2. Project layout .....	3

## Tables

Table 1. Sound Levels of Representative Sounds and Noises .....	5
Table 2. Average Human Ability to Perceive Changes in Sound Levels .....	5
Table 3. Maximum Permissible Noise Levels at Noise Receiving Zones Provided in Santa Fe, New Mexico – Code of Ordinances, Chapter X – Environmental Regulations, Section 10-2 – Noise .....	8
Table 4. Summary of Predicted Noise Generation from the Proposed Construction Equipment by Distance.....	10
Table 5. Equipment Sound Power Levels.....	11
Table 6. Summary of Estimated Noise Levels from Project Operation.....	14

# 1 INTRODUCTION

SWCA Environmental Consultants (SWCA) prepared this noise technical report in support of the proposed Rancho Viejo Solar Project (project). The project would be developed by Rancho Viejo Solar, LLC. The project would be in unincorporated Santa Fe County, New Mexico (county), in the northern part of the state.

This report presents the analysis and noise impact estimates for the construction and operation of the project at the property boundaries and at noise sensitive areas (NSAs) to demonstrate that the proposed activities associated with this project will not result in a substantial permanent increase in ambient noise levels in the vicinity of the project.

## 1.1 Project and Study Description

Rancho Viejo Solar, LLC proposes to design, construct, operate, and maintain a solar energy generation and storage site in Santa Fe County, New Mexico. The project includes the development of a 96-megawatt solar facility, a 48-megawatt battery energy storage system (BESS), a substation, an operations building, a water storage tank, a generation tie-in line, and an access road on private land approximately 3 miles south of Santa Fe city limits and approximately 4.2 miles east of La Cienega (Figure 1). A general layout of the facility based on its current design is provided in Figure 2.

Potential noise impacts from the construction and operation of the project were evaluated by determining the projected noise increases over ambient conditions and potential exposure of sensitive receptors to excessive noise from the proposed noise-generating sources.

Construction of the project will consist of earthwork (e.g., site grading) and the construction of a solar facility. Predicted construction-generated noise levels at nearby NSAs were calculated using the Federal Highway Administration (FHWA) Roadway Construction Noise Model (RCNM). The RCNM is FHWA's national model for the prediction of construction noise.

Among project operational components, the sources with potential to impact ambient noise levels are inverters, transformers, BESS equipment and solar trackers.

The noise impact evaluation for the operation of the project, provided herein, consists of computer noise modeling using SoundPLAN Essential Version 5.1 and assessment of the outputs as they pertain to the sound (noise) standards and nearest property boundaries and NSAs (i.e., residences).

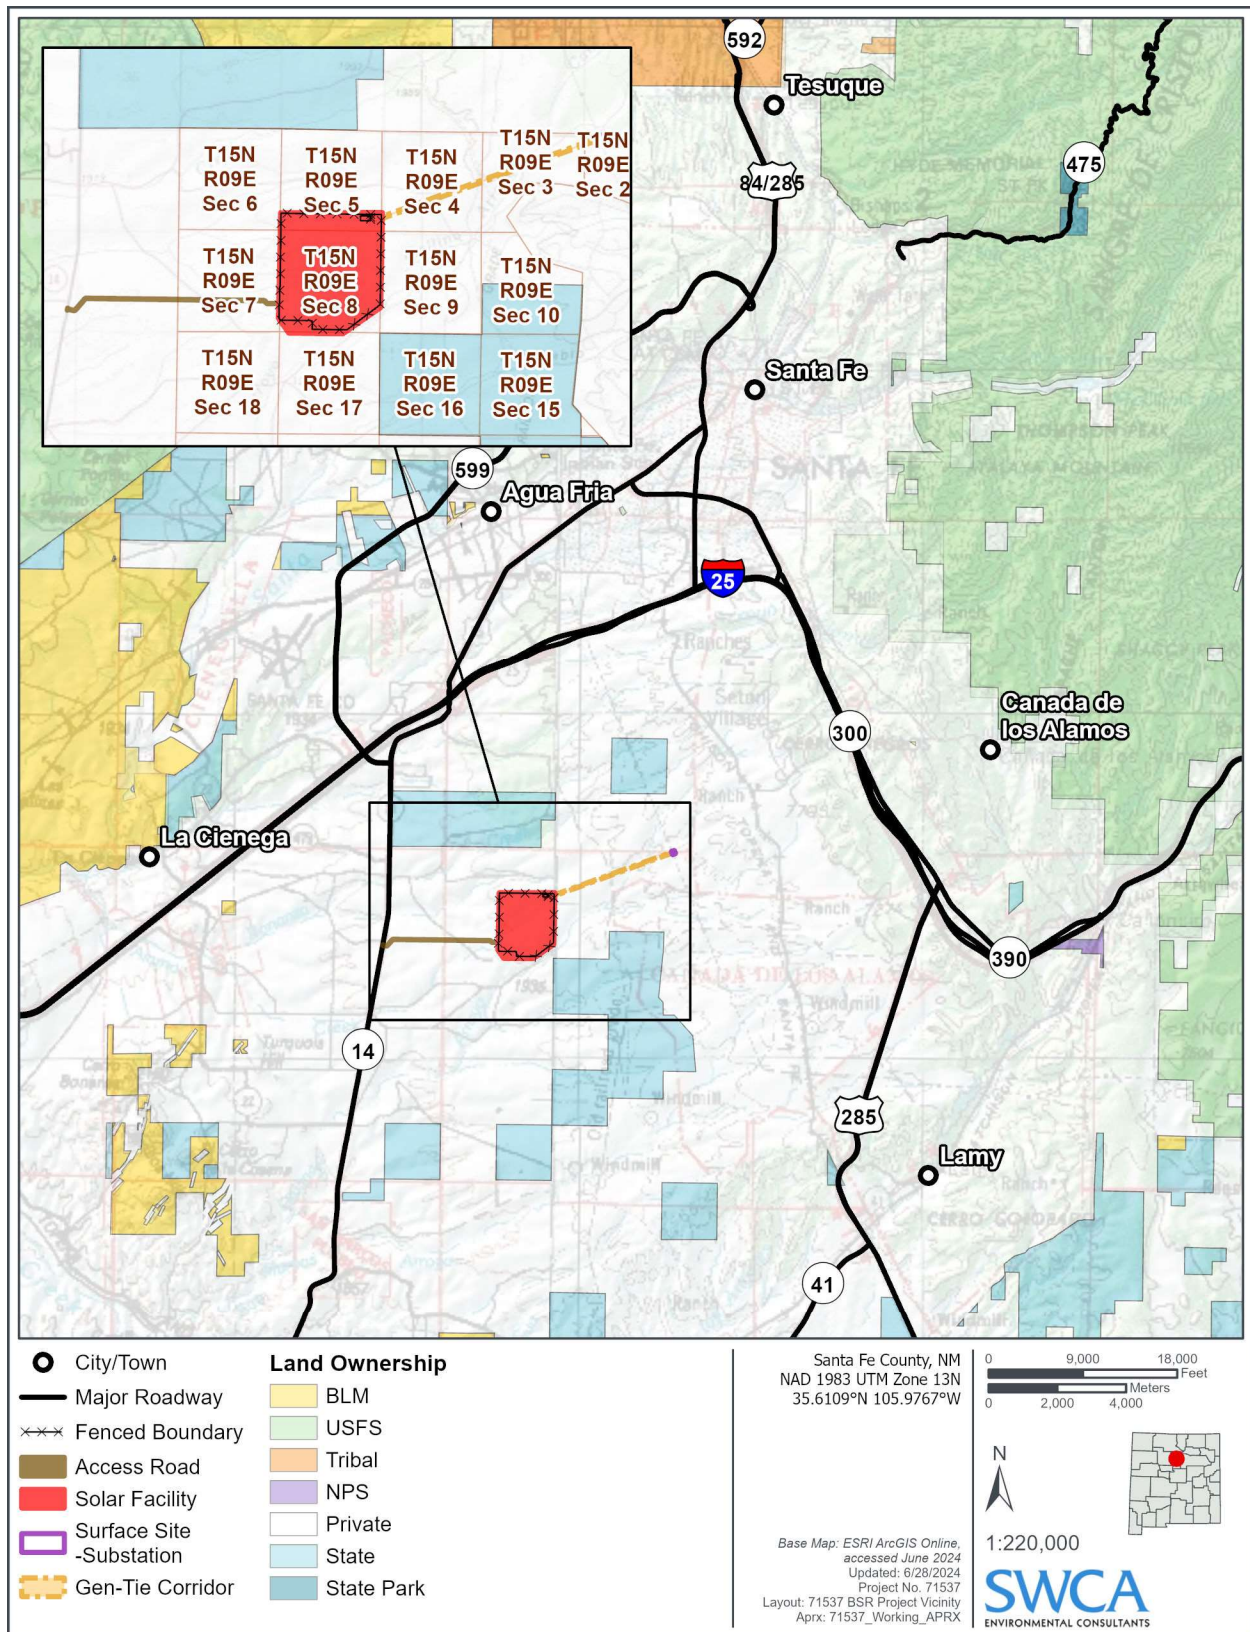


Figure 1. Project vicinity map.



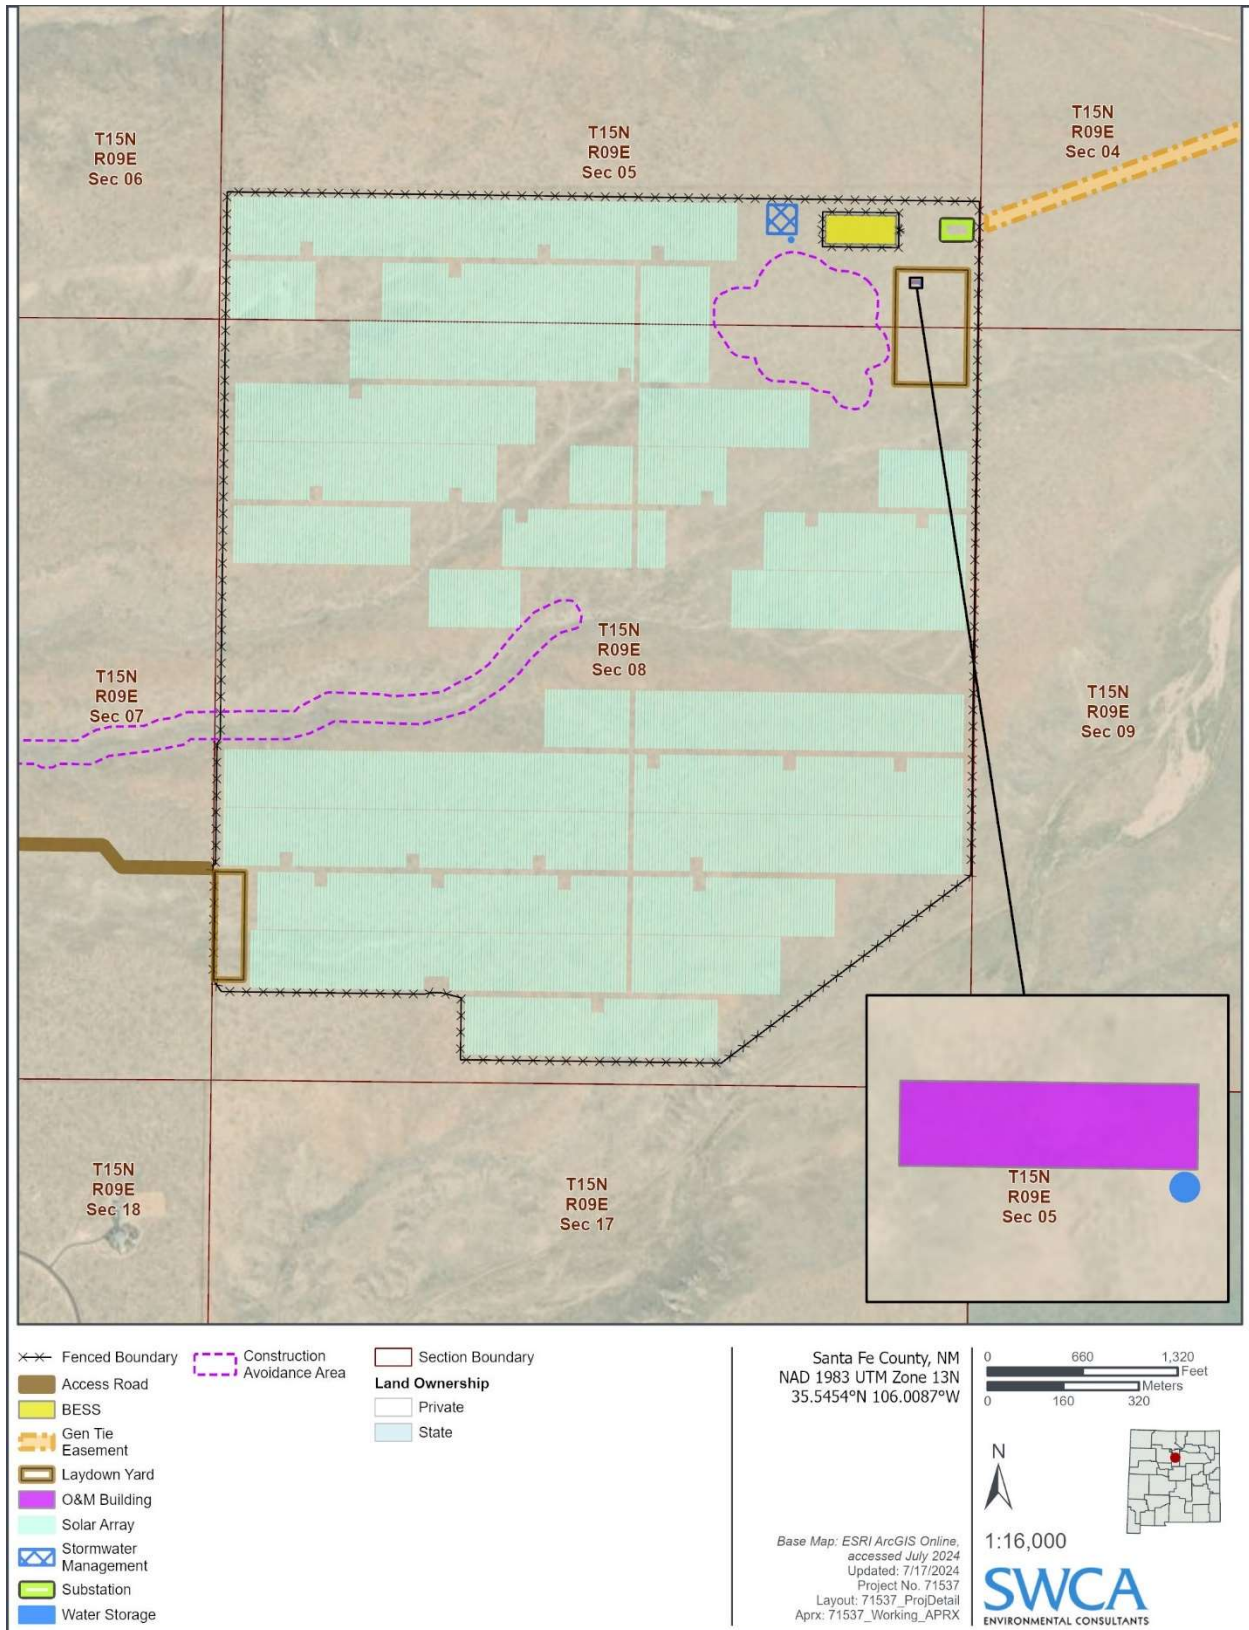


Figure 2. Project layout.



## 1.2 Sound Fundamentals – Background

Sound is defined as a form of energy that is transmitted by pressure variations, which the animal or human ear can detect. Noise can be defined as any unpleasant or unwanted sound that is unintentionally added to a desired sound or environment. The noise effects in humans include interference with communication, learning, rest, or sleep and physiological health effects. There are two main properties of sound: the amplitude and the frequency. Amplitude refers to the level of energy that reaches the ear (how loud we perceive the sound), while frequency is the number of cycles or oscillations per unit of time completed by the source. Frequency is normally expressed in hertz (Hz).

Sound power is defined as the measurement of the ability of a source to make sound. It is independent of the acoustic environment in which is located. The sound power level ( $L_w$ ) of a source is the amount of energy it produces relative to a reference value and is normally expressed in decibels. The decibel is a logarithmic scale to describe the sound pressure ratio.

Humans perceive a frequency range of about 20 Hz to about 20,000 Hz. An internationally standardized frequency weighting, the A-weighting scale, was designed to approximate the audible range of frequencies of a healthy human ear. The A-weighting scale corresponds to the fact that the human ear is not as sensitive to sound at the lower frequencies as it is at the higher frequencies.

### 1.2.1 Definition of Acoustical Terms

Several different descriptors of time-averaged sound levels are used to account for fluctuations of sound intensity over time. The sound descriptors calculated by the sound meters and used in this report to describe environmental sound are defined below.

- Ambient sound level is defined as the composite of noise from all sources near and far, the normal or existing level of environmental noise at a given location.
- Decibel (dB) is the physical unit commonly used to measure sound levels. Technically, a dB is a unit of measurement that describes the amplitude of sound equal to 20 times the base 10 logarithm of the ratio of the reference pressure to the sound of pressure, which is 20 micropascals ( $\mu\text{Pa}$ ).
- Equivalent noise level ( $L_{eq}$ ) is the energy average A-weighted noise level during the measurement period.
- Day-night sound level ( $L_{dn}$ ) is the A-weighted equivalent sound level for a 24-hour period with an additional 10 dB weighting imposed on the equivalent sound levels occurring during night-time hours (10 p.m. [22:00] to 7 a.m. [07:00]).
- Daytime Sound Level ( $L_d$ ) is defined as the equivalent sound level for a 15-hour period between 7 a.m. (07:00) and 10 p.m. (22:00).

### 1.2.2 Sound Levels of Representative Sounds and Noises

The U.S. Environmental Protection Agency (EPA) has developed an index to assess noise impacts from a variety of sources using residential receptors. If  $L_{dn}$  values exceed 65 dBA, residential development is not recommended (EPA 1979). Noise levels in a quiet rural area at night are typically between 32 and 35 dBA. Quiet urban night-time noise levels range from 40 to 50 dBA. Levels above 70 dBA tend to be associated with task interference. Levels between 50 and 55 dBA are associated with raised voices in a normal conversation. Noise levels during the day in a noisy urban area are frequently as high as 70 to 80 dBA. Noise levels above 110 dBA become intolerable. Table 1 presents sound levels for some common noise sources and the human response to those decibel levels.

**Table 1. Sound Levels of Representative Sounds and Noises**

Source and Distance	Sound Level (dBA)	Human Response
Jet takeoff (nearby)	150	
Jet takeoff (15 m/50 feet)	140	
50-hp siren (30 m/100 feet)	130	
Loud rock concert (near stage)	120	Pain threshold
Construction noise (3 m/10 feet)	110	Intolerable
Jet takeoff (610 m/2,000 feet)	100	
Heavy truck (8 m/25 feet)	90	
Garbage disposal (0.6 m/2 feet)	80	Constant exposure endangers hearing
Busy traffic	70	
Normal conversation	60	
Light traffic (30 m/100 feet)	50	Quiet
Library	40	
Soft whisper (4.5 m/15 feet)	30	Very quiet
Rustling leaves	20	
Normal breathing	10	Barely audible
Threshold of hearing	0	

Source: Beranek (1988).

Table 2 provides criteria that have been used to estimate an individual's perception of increases in sound. In general, an average person perceives an increase of 3 dBA or less as barely perceptible. An increase of 10 dBA is perceived as a doubling of the sound.

**Table 2. Average Human Ability to Perceive Changes in Sound Levels**

Increase in Sound Level (dBA)	Human Perception of Sound
2–3	Barely perceptible
5	Readily noticeable
10	Doubling of the sound
20	Dramatic change

Source: Bolt Beranek and Newman, Inc. (1973).

## 2 EXISTING CONDITIONS

### 2.1 Existing Land Use and Site Conditions

The site is located in Santa Fe County, New Mexico. The lands within the Project area are privately managed. State Land Office–managed lands are located north (0.8 mile) and southeast (0.2 mile) of the Project area. The project is located in a rural setting with predominantly undeveloped rangelands; however, there are several existing residential and commercial developments and industrial uses. The nearest noise sensitive receptor to a project boundary is a residence located approximately 1,400 feet to the southwest.

## 2.2 Existing Sound Conditions

### 2.2.1 Existing Sound Levels

Santa Fe County is a semi-rural, semi-urban county in central New Mexico. The acoustical environment in the Project area and its immediate vicinity generally features relatively low ambient noise levels characteristic of rural settings. Noise in the region typically ranges from very quiet, dominated by natural sounds such as birds, wind, and occasional wildlife, to moderately noisy in localized areas near towns, highway crossings, or other human activities. Small ranches and rural residences are scattered throughout the area, contributing minimally to the overall soundscape.

The American National Standards Institute (ANSI) has published a standard (Acoustical Society of America ANSI/ASA S12.9-2013/Part 3) (ANSI 2013) that provides estimates of general ambient noise levels based on detailed descriptions of land use categories. The ANSI document classifies land use into six categories. Based on an analysis of the area surrounding the Project, the noise at the property lines of interest aligns most closely with ANSI's *Category 6 – Very Quiet Suburban and Rural Residential Areas*, which assumes an ambient daytime noise level ( $L_d$ ) of 40 dBA and an ambient nighttime noise level ( $L_n$ ) of 34 dBA.

Santa Fe County recently conducted ambient noise measurements in the Project area. Two readings were taken on Friday, November 15, 2024, around 10:00 AM, near the location of the BESS and at the closest point from the Project to the neighborhood on the southwest corner. The average daytime ambient noise level recorded by the County was 38.4 dBA (J.A. Yutzy, email communication, November 20, 2024), slightly below the ANSI Category 6 daytime assumption.

Based on this information, the study assumes an ambient  $L_d$  of 38.4 dBA, as measured by the County, and an ambient nighttime noise level  $L_n$  of 34 dBA, consistent with ANSI Category 6 for very quiet suburban and rural residential areas.

## 2.3 Regulatory Setting

Federal, state, and local agencies have set noise regulations and policies to protect the health and welfare of the public, as described below.

### 2.3.1 Applicable Noise Standards

#### 2.3.1.1 FEDERAL

In 1974 the EPA published Information on Levels of Environmental Noise Requisite to Protect Public Health and Welfare with an Adequate Margin on Safety. In this publication, the EPA evaluated the effects of environmental noise with respect to health and safety and determined an  $L_{dn}$  of 55 dBA (equivalent to a continuous noise level of 48.6 dBA) to be the maximum sound level that will not adversely affect public health and welfare by interfering with speech or other activities in outdoor areas.

#### 2.3.1.2 STATE

No state laws regulating noise were identified during a review of potentially applicable regulations.

### **2.3.1.3 SANTA FE COUNTY**

#### **Sante Fe County Ordinance No. 2016-9 Chapter 7 – Sustainable Design Standards**

This ordinance provides restrictions on noise generating activities that occur within Santa Fe County. Under section 131.21 Prohibitions of this ordinance, it is stated that:

The maximum permissible noise limit at the property line shall not exceed the following depending on the zoning district:

##### **Industrial and Commercial Zoning Districts:**

- Daytime (7:00 a.m. to 10:00 p.m.): 75 dB(A), or 10 dB(A) above ambient; whichever is less
- Nighttime (10:00 p.m. to 7:00 a.m.): 60 dB(A), or 5 dB(A) above ambient; whichever is less

##### **All Other Districts:**

- Daytime (7:00 a.m. to 10:00 p.m.): 55 dB(A), or 5 dB(A) above ambient; whichever is less
- Nighttime (10:00 p.m. to 7:00 a.m.): 45 dB(A), or 5 dB(A) above ambient; whichever is less

Based on the Santa Fe County Zoning Maps, no Industrial or Commercial Zoning Districts are located immediately adjacent to the Project. As a result, the noise limits for All Other Districts were applied in this analysis to assess noise impacts.

Consistent with the Santa Fe County measured value, the assumed daytime ambient noise level used for this noise analysis is 38.4 dBA. According to the language of the ordinance, the maximum allowable noise limit is determined as 5 dBA above the ambient noise level or 55 dBA, whichever is lower. For daytime, adding 5 dBA to the ambient noise level results in a threshold of 43.4 dBA, which is lower than the fixed limit of 55 dBA. Therefore, 43.4 dBA is the applicable daytime noise limit.

Similarly, the assumed nighttime ambient noise level is 34 dBA. Adding 5 dBA to the ambient noise level results in a threshold of 39 dBA, which is lower than the fixed limit of 45 dBA. Therefore, 39 dBA is the applicable nighttime noise limit.

#### **Sante Fe County Ordinance No. 2009-11**

The Santa Fe County Noise Control and Public Nuisance Ordinance (2009-11) establishes specific restrictions on noise-generating activities to safeguard public health, safety, and quality of life. It defines maximum permissible sound levels and outlines enforcement procedures, while also identifying certain exceptions to its application.

The ordinance specifies that sound levels should not exceed 60 dBA between 10:00 p.m. and 7:00 a.m. or 75 dBA between 7:00 a.m. and 10:00 p.m. Compliance with these limits is determined based on measurements taken at 25 feet from the perimeter of a noise-sensitive unit or within the noise-sensitive unit itself. These limits must not be exceeded for more than five consecutive minutes, ten minutes in any half-hour, or intermittently on ten or more occasions within the same period.

Several exceptions to the sound restrictions are provided under the ordinance. For instance, noise caused by emergency work, regulated industrial activities, or agricultural operations is exempt. Additionally, public or private utility work related to maintenance, construction, or repairs conducted in easements, property, or public rights-of-way is also excluded from the ordinance's limitations.

For the Rancho Viejo Solar Project, compliance with these sound limits will be required to ensure adherence to the ordinance during both daytime and nighttime operations. While certain project-related activities may qualify for exemptions under the ordinance’s provisions, routine operations must align with the specified sound thresholds.

For this analysis, the noise thresholds in Santa Fe County Ordinance No. 2016-9, Chapter 7 – Sustainable Design Standards were applied instead. These limits, set at 55 dBA or 5 dBA above ambient during the day and 45 dBA or 5 dBA above ambient at night (whichever is lower), are tailored to specific zoning districts and better reflect the rural and residential land use surrounding the project site.

The Sustainable Design Standards provide a more localized and stringent framework for evaluating noise impacts in alignment with the zoning and land use characteristics of the project area.

#### 2.3.1.4 CITY OF SANTA FE

##### **Santa Fe, New Mexico – Code of Ordinances, Chapter X – Environmental Regulations, Section 10-2 – Noise**

This ordinance provides restrictions on noise generating activities in order to ensure residents of Santa Fe are provided with an environment free from such excessive sound that may jeopardize their health, welfare and safety, or degrade the quality of life.

Section 10-2.4 of this ordinance (Noises Prohibited) restricts the allowable hours for construction activities within the city of Santa Fe. This section specifically applies to construction activities occurring within the city limits. Because the project is located outside of the city limits, this section is not applicable and no limitations on the allowable hours for construction activities based on noise ordinances have been identified.

Section 10-2.5 of this ordinance (Zone district noise levels; maximum; correction) provides the maximum allowable noise levels that are permitted at different receiving zones. This regulation stipulates that:

- A. It is a violation of this section for any person to operate or permit to be operated any stationary source of sound in such a manner as to create a ninetyeth percentile sound pressure level (L90) for a measurement period of ten (10) minutes or more unless otherwise provided in this section, which exceeds the limits set forth for the following receiving zones. The location for measuring exterior sound levels shall be at least one foot (1') inside the property line of the affected property and three to six feet (3' to 6') above ground level and at least four feet (4') from walls and other reflective surfaces.

**Table 3. Maximum Permissible Noise Levels at Noise Receiving Zones Provided in Santa Fe, New Mexico – Code of Ordinances, Chapter X – Environmental Regulations, Section 10-2 – Noise**

Zone District	9:00 p.m. to 7:00 a.m.	7:00 a.m. to 9:00 p.m.
<b>Residential</b>	<b>50 dBA</b>	<b>55 dBA</b>
R-1, R-2, R-3, R-4, R-5, R-7, RC-5, RC-8, RM, RAC, AC, PRC, PRRC, HZ, Mobile Home Park		
<b>Commercial</b>	<b>55 dBA</b>	<b>60 dBA</b>
C-1, C-2, C-4, SC, BCD		
<b>Industrial-Agricultural</b>	<b>70 dBA</b>	<b>75 dBA</b>
I-1, I-2, IP		

When a noise source can be identified and its noise measured in more than one (1) land use category, the limits of the more restrictive use shall apply at the boundaries between different zones.

Although the project is located outside the City of Santa Fe, potential noise impacts within the city are acknowledged. However, Santa Fe County Ordinance No. 2016-9, Chapter 7 – Sustainable Design Standard provides more restrictive noise limits than those established by the City of Santa Fe. Because this ordinance imposes stricter thresholds for allowable noise levels, it was applied to assess the project’s potential noise impacts.

By demonstrating compliance with the stricter standards set forth in Santa Fe County Ordinance No. 2016-9, the project inherently complies with the City of Santa Fe’s noise requirements. Therefore, the city ordinance was not independently applied in this analysis.

### **3 NOISE IMPACTS**

The following section provides results and interpretation of potential impacts from noise generated by the project during construction and operation phases.

#### **3.1 Noise Assessment Components**

A noise assessment is based on the following components: a sound-generating source, a medium through which the source transmits, the pathways taken by these sounds, and an evaluation of the proximity to impact locations. Soundscapes are affected by the following factors:

- **Source.** The sources of sound are any generators of small back-and-forth motions (i.e., motions that transfer their motional energy to the transmission path where it is propagated). The acoustic characteristics of the sources are very important. Sources must generate sound of sufficient strength, approximate pitch, and duration so that the sound may be perceived and can cause adverse effects, compared with the natural ambient sounds.
- **Transmission path or medium.** The transmission path or medium for sound or noise is most often the atmosphere (i.e., air). For the noise to be transmitted, the transmission path must support the free propagation of the small vibratory motions that make up the sound. Atmospheric conditions (e.g., wind speed and direction, temperature, humidity, precipitation) influence the attenuation of sound. Barriers and/or discontinuities (e.g., existing structures, topography, foliage, ground cover, etc.) that attenuate the flow of sound may compromise the path. For example, sound will travel very well across reflective surfaces such as water and pavement but can attenuate across rough surfaces (e.g., grass, loose soil).
- **Proximity to NSAs.** An NSA is defined as a location where a state of quietness is a basis for use or where excessive noise interferes with the normal use of the location. Typical NSAs include residential areas, parks, and wilderness areas, but also include passive parks and monuments, schools, hospitals, churches, and libraries.

#### **3.2 Construction Noise**

The noise levels generated by construction equipment vary significantly and depend on several different parameters, such as the type, model, size, and condition of the equipment; the operation schedule; and the condition of the area being worked. Additionally, construction projects are accomplished in several different stages. Each stage has a specific equipment mix, depending on the work to be completed.

### 3.2.1 Equipment and Machinery

The use of heavy equipment such as hoist cranes, excavators, dozers, and backhoes during construction will temporarily elevate ambient noise levels in the vicinity of the project site. Standard construction equipment typically operates within a range of 75 to 85 dBA at a distance of 50 feet from the source. In outdoor environments, noise levels decrease with distance, influenced by factors such as topography, vegetation, weather, and nearby traffic. On average, noise from a point source decreases by 6 dBA with each doubling of distance (Berger et al. 2003; Radtke 2016).

Noise impact calculations for this project use established noise attenuation principles and sound level reduction formulas for construction equipment, with a reference distance of 50 feet from the sound source (Thalheimer 2000). The noise generated by equipment operating within the range of 75 to 85 dBA is shown to attenuate predictably over distance, as illustrated in Table 4.

Additional sources of noise, such as worker commutes and material delivery vehicles, are expected to be short-term and sporadic, with minimal impact on hourly average noise levels. These temporary sources will have limited influence on overall noise conditions at sensitive receptors in the project area.

**Table 4. Summary of Predicted Noise Generation from the Proposed Construction Equipment by Distance**

Equipment - 75 dBA at 50 feet		Equipment - 80 dBA at 50 feet		Equipment - 85 dBA at 50 feet	
Distance in Feet from the Source (miles [approximate])	Noise Level (dBA)	Distance in Feet from the Source (miles [approximate])	Noise Level (dBA)	Distance in Feet from the Source (miles [approximate])	Noise Level (dBA)
50 (0.01)	75	50 (0.01)	80	50 (0.01)	85
100 (0.02)	69	100 (0.02)	74	100 (0.02)	79
200 (0.04)	63	200 (0.04)	68	200 (0.04)	73
400 (0.08)	57	400 (0.08)	62	400 (0.08)	67
800 (0.15)	51	800 (0.15)	56	800 (0.15)	61
1,600 (0.30)	45	1,600 (0.30)	50	1,600 (0.30)	55
3,200 (0.60)	39	3,200 (0.60)	44	3,200 (0.60)	49
6,400 (1.21)	33	6,400 (1.21)	38	6,400 (1.21)	43
12,800 (2.42)	27	12,800 (2.42)	32	12,800 (2.42)	37

Based on noise attenuation, construction equipment noise levels will be expected to dissipate to below background levels (assumed to be 38.4 dBA) within approximately 0.5 mile to 1.7 miles of the Project area. The closest sensitive noise receptor, a residence located approximately 1,400 feet (0.27 miles) away, will experience a temporary increase in ambient outdoor noise levels during the 12-month construction period. At this distance, noise levels from equipment operating at 85 dBA are estimated to attenuate to approximately 56 dBA, comparable to the noise level of a normal conversation in a quiet room or light office noise.

Sensitive noise receptors between 1,600 feet (0.3 mile) and 3,200 feet (0.6 mile) away consist of 114 residences and the Turquoise Trail Charter School and will experience a temporary increase in ambient outdoor noise levels, which will attenuate to approximately 55 dBA or less, comparable to the noise level of a quiet suburban street. Sensitive noise receptors between 3,200 feet (0.6 mile) and 6,400 feet (1.2 miles) away consist of 262 residences and will experience a temporary increase in ambient outdoor noise levels, which will attenuate to levels 43 dBA or less comparable to the noise level of a quiet library or soft whisper.



It is expected that construction would occur primarily during daytime hours, though it is potential that some nighttime construction activities may be required. Santa Fe County Ordinance No. 2009-11, Section 7, exempts sounds made by activities performed at the direction of Santa Fe County or by any public or private utility for maintenance, construction, or repair of public improvements. It is anticipated that the project will qualify for this exemption.

### 3.3 Operational Noise

To determine the potential noise impact from these sources, detailed noise modeling was conducted. The noise levels at the property boundaries and at identified NSAs in the vicinity of the project from the operation of the project have been predicted and compared with the relevant noise criteria, including the Santa Fe County Ordinance No. 2016-9 Chapter 7 – Sustainable Design Standards at property boundaries and the EPA’s  $L_{dn}$  of 55 dBA at residential NSAs.

#### 3.3.1 Operational Activities

The primary noise sources anticipated during operation of the proposed project are inverters, BESS equipment, solar trackers, and transformers.

#### 3.3.2 Noise Profile

The sound power level ( $L_w$ ) and quantities for each equipment noise source is listed in Table 5. All equipment sound levels were estimated based on available data from the equipment manufacturers or obtained from other sources or calculations where manufacturer’s data were not available.

**Table 5. Equipment Sound Power Levels**

Equipment	1/1 Octave Spectrum									dBA	Qty.
	31Hz	63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz		
Aux Transformer	84	90	92	87	87	81	76	71	64	87.4	1
Substation Transformer	84	90	92	87	87	81	76	71	64	87.4	1
BESS HVAC	94	94	94	94	92	87	87	86	80	72 <sup>1</sup>	38
BESS Chiller	94	94	94	94	92	87	87	86	80	61 <sup>1</sup>	19
PCS Inverter	86	87	91	86	92	83	83	73	74	95.8	19
SG4400UD-MV-US	84	90	92	87	87	81	76	71	64	96	25
Solar Tracker Motor	94	94	94	94	92	87	87	86	80	72 <sup>1</sup>	72

<sup>1</sup> Representative spectra were used for equipment for which only dBA levels were used. dBA values noted here are the dBA values resulting from converting the spectra to a dBA value, then applying a correction factor. As a result, frequency values presented here do not directly correspond to the noted dBA values.

In addition to the equipment listed in Table 5, a 115 kV transmission line is proposed. However, based on previous analyses, it is generally accepted that 115 kV transmission lines are not responsible for audible noise that can be perceived by humans during fair weather (CH2M 2012). Additionally, any corona discharges resulting in increased noise levels during foul (wet) weather would typically be quieter than the rain that would cause the increase in noise levels from the transmission line and would similarly not be perceptible to a human observer. It is expected that any noise generated during foul weather would attenuate to less than background noise levels at the edge of the right of way for the transmission line. For this reason, the 115 kV transmission line was not included in the SoundPLAN model.

### **3.3.2.1 INTERMITTENT NOISE SOURCES**

An intermittent noise source represents any stationary noise source which is periodically or intermittently active during the day or night. Solar trackers were modeled in SoundPLAN assuming that they would only be operational during daytime hours, and that they would be intermittent sources of noise. Other noise-emitting sources with intermittent daily operation of 4 hours or less, or emergency operation only units, were not considered in the model.

### **3.3.3 Assessment Methodology**

Based on the sound power levels for each of the sources, SoundPLAN estimates noise contours of the overall project in accordance with a variety of standards, primarily International Standards Organization (ISO) 9613-2:1996, Acoustics, standards for noise propagation calculations. All sound propagation losses, such as geometric spreading, air absorption, ground absorption, and barrier shielding, are calculated in accordance with these recognized standards.

The model accounts for reflection, from adjacent structures and the ground. The model uses industry-accepted propagation algorithms and accepts sound power levels (in dB) provided by the manufacturer and other sources. The calculations account for classical sound wave divergence, plus attenuation factors resulting from air absorption, basic ground effects, and barrier/shielding. SoundPLAN does not account for noise modulation or refraction.

The sound propagation model considers the following influences:

- sound power levels and locations of noise sources
- distance between noise sources and receivers
- topography of the area
- influence of the absorption provided by the ground
- shielding from structures or vegetation
- air absorption
- meteorological conditions

The ISO 9613-2 methodology provides tables and equations for estimating the atmospheric absorption coefficient corresponding to various temperatures and humidity levels. Topographic inputs were also included in the model.

The ISO 9613-2 standard estimates sound pressure levels at a specified distance by subtracting the attenuation factors from the source sound power level for each source in octave frequency bands. Attenuation factors include geometrical divergence, atmospheric attenuation, ground effect, and barrier attenuation. These terms are defined as follows.

- Geometrical divergence occurs as the source sound power is spread out over an increasing surface area (i.e., as the distance from the source increases). The estimated loss rate is the same for all frequencies. This is considered the most significant loss associated with propagation. Attenuation due to geometrical divergence is highly dependent on the distance between the source and the receiver. Direction also affects the noise level; 0° direct line of sight noise level will be higher than 90° direction line of sight to a stack emission point. Therefore, the differences in ground elevation and receiver height and hub height (source height) are important parameters.

- Losses due to atmospheric attenuation occur as the energy in the sound wave is transformed to heat. As this attenuation is frequency dependent and high frequencies are more readily attenuated than low frequencies, these losses are highly influenced by humidity and temperature.
- Ground effect is described according to the parameter Ground Factor, which varies between 0 for surfaces with low porosity (“hard” ground) and 1 for “soft” ground (surfaces including loose dirt, grass, crops, and other vegetation). This factor describes the effect of sound waves reflected off the ground. Parameters influencing the ground effect are the source height, receiver height, and propagation distance between the source and receiver and the ground conditions. Barrier attenuation describes the effect of sound waves refracted around an imperforate element or barrier.
- A barrier could include human-made objects such as structures, buildings, and fences, as well as topographical features. Therefore, the differences in ground elevation, source height, receiver height, dimensions, and location absorption and reflection coefficients of human-made structures and topographic features are important parameters when estimating barrier attenuation in SoundPLAN.

The following assumptions were made when running SoundPLAN:

- The model assumed all proposed noise-generating sources operated concurrently.
- Noise impacts at the selected impact locations and depicted in the isopleths were estimated assuming a receiver height of 5 feet above ground level.
- Elevations of the sources and of the receptors examined in the modeling were determined from U.S. Geological Survey Digital Elevation Map (DEM) and are based on North American Datum of 1927. The DEM files each had a 100-foot resolution (7.5-minute DEM providing coverage of 7.5 × 7.5-minute blocks).
- To better represent the actual conditions of the proposed project and to ensure that both hard and soft ground absorption were considered, acoustically hard sites including surfaces such as pavement and bare hard ground were assumed to have high reflectivity properties and a ground absorption coefficient of 0.0 was used. Ground cover in the vicinity of the project was analyzed using satellite imagery from Google Earth. A higher ground factor of 1.0 was defined for more absorptive ground, such as vegetation and loose soil. Semi-hard materials such as gravel and sand were assumed to have a ground absorption coefficient of 0.6.

### **3.3.4 Operational Noise Impacts**

The calculated noise levels emitted by the Project comply with the Santa Fe County Ordinance No. 2016-9 Chapter 7 and are also below the EPA’s recommended 55 dBA  $L_{dn}$  standard (equivalent to 48.6 dBA  $L_{eq}$ ) at the NSAs. The highest noise levels due to project operations at the property boundary, where the maximum noise impacts are expected, were estimated to be 36.5 dBA during both daytime and nighttime hours. When including assumed ambient noise levels, the total estimated noise level at the closest property boundary is 40.6 dBA during daytime hours and 38.4 dBA during nighttime hours.

These noise levels were determined using estimates generated by SoundPLAN modeling software at the nearest property boundary located southwest of the project area. All other property boundaries are expected to experience lower noise levels from project operations due to increased distance or shielding effects. Consequently, the project’s noise remains below the specified standards.

Table 6 summarizes the overall noise levels, including background noise, project contributions, and total noise levels, at the property boundary expected to experience the maximum impact in A-weighted decibels.

**Table 6. Summary of Estimated Noise Levels from Project Operation**

Description	Project Contribution (dBA)	Representative Background Noise Levels (dBA)	Total Calculated Noise Levels (dBA)	Estimated Noise Increase (dBA)
Loudest Property Line Modeled Noise Level	36.5	38.4 *	40.6	2.2
Santa Fe County Noise Limit (daytime)	-	-	43.4	-
Loudest Property Line Modeled Noise Level	36.5	34.0 †	38.4	4.4
Santa Fe County Noise Limit (nighttime)	-	-	39.0	-

\* Based on measurements conducted by Santa Fe County near the Project site on November 15, 2024 (J.A. Yutzy, email communication, November 20, 2024)

† The nighttime ambient noise level of 34.0 dBA is derived from ANSI/ASA S12.9-2013/Part 3, which defines typical noise levels for Category 6 – Very Quiet Suburban and Rural Residential Areas (ANSI 2013).

The Project's operational noise levels comply with the Santa Fe County Ordinance No. 2016-9 Chapter 7 – Sustainable Design Standards. As summarized in Table 6, the loudest modeled noise level at the property boundary during daytime hours is 36.5 dBA. When combined with the ambient noise level of 38.4 dBA, the total calculated daytime noise level is 40.6 dBA, which remains below the applicable 43.4 dBA daytime noise limit. Similarly, during nighttime hours, the loudest modeled noise level is also 36.5 dBA. When combined with the ambient nighttime noise level of 34.0 dBA, the total calculated nighttime noise level is 38.4 dBA, which remains below the applicable 39.0 dBA nighttime noise limit. These results confirm that the Project will comply with Santa Fe County's noise standards for both daytime and nighttime conditions.

Regarding human perception of changes in sound levels (i.e., potential increases above ambient), the estimated increase at the property boundary is 2.2 dBA during daytime hours and 4.4 dBA during nighttime hours. According to established thresholds for human perception, an increase of 2–3 dBA is considered barely perceptible, while an increase of 5 dBA is readily noticeable. Therefore, the daytime increase would be barely perceptible to the average human observer, and the nighttime increase would be at the upper end of "barely perceptible" but not reach the threshold of a "readily noticeable" change.

These increases are estimated at the property boundary, where the highest noise impacts are predicted. At NSAs, the increases are expected to be lower due to the additional distance and attenuation effects.

As a result, the proposed operation is not expected to result in a substantial permanent increase in ambient noise levels in the vicinity of the project. The predicted noise increases would not produce sound levels that are audibly distinct to residents at these locations.

Noise contour grid maps were generated by SoundPLAN software and are presented in Appendix A. The maps depict the extent of noise propagation from the SoundPLAN models that were developed for the noise impact assessment. The noise contour map illustrates the extent of noise associated with the proposed development. It is important to note that the extent of the impacts depicted in these figures does not include the contribution of the existing background noise.

## 4 LITERATURE CITED

- American National Standards Institute (ANSI). 2013. *Quantities and Procedures for Description and Measurements with an Observer Present – Part 3: Short-term Measurements with an Observer Present*, ANSI/ASA S12.9-2013/Part 3. American National Standards Institute, Inc.
- American Society for Testing and Materials (ASTM). 2012. *E1014-12, Standard Guide for Measurement of Outdoor A-Weighted Noise levels*. West Conshohocken, Pennsylvania: American Society for Testing and Materials International.
- Beranek, L.L. (ed.). 1988. *Noise and Vibration Control*. Washington, D.C.: Institute of Noise Control Engineering
- Berger, E., L. Royster, and J. Royster. 2003. Noise Surveys and Data Analysis. In *The Noise Manual*, 5th ed., pp. 186–189. Fairfax, Virginia: American Industrial Hygiene Association.
- Bolt Beranek and Newman, Inc. 1973. *Fundamentals and Abatement of Highway Traffic Noise*. Report Number PB-222-703. Prepared for U.S. Department of Transportation, Federal Highway Administration. Bolt Beranek and Newman, Inc.
- CH2M Hill. 2012. *United Power Phase III Transmission Line Project Electric and Magnetic Fields and Audible Noise*.
- Federal Highway Administration (FHWA). 2011. Roadway Construction Noise Model (RCNM). Software Version 1.1. Federal Highway Administration.
- Federal Transit Administration (FTA). 2018. *Transit Noise and Vibration Impact Assessment Manual*. FTA Report No. 0123. Washington, D.C.: U.S. Department of Transportation, Federal Transit Administration, Office of Planning and Environment.
- Santa Fe County. 2009. Ordinance No. 2009-11: Noise Control and Public Nuisance Ordinance. Santa Fe County, NM. Available at: <https://www.santafecountynm.gov/documents/ordinances/Ordinance200911K.pdf>
- Santa Fe County. 2016. Ordinance No. 2016-9: Chapter 7 – Sustainable Design Standards. Santa Fe County, NM. Part of the Santa Fe County Sustainable Land Development Code (SLDC). Available at: <https://www.santafecountynm.gov/slhc>
- Thalheimer, E. 2000. *Construction Noise Control Program and Mitigation Strategy at the Central Artery/Tunnel Project*. Boston, Massachusetts: Noise Control Engineering.
- U.S. Environmental Protection Agency (EPA). 1979. Protective Noise Levels, Condensed Version of EPA Levels Document. Available at: <http://www.nonoise.org/library/levels/levels.htm>.
- Yutzy, J. A. (2024, November 20). *RE: Rancho Viejo - SLDC 4.6.3.5 - Verification*. Email communication to M. Gordon. Santa Fe County.

## **APPENDIX A**

### **Project Operation Noise Maps**

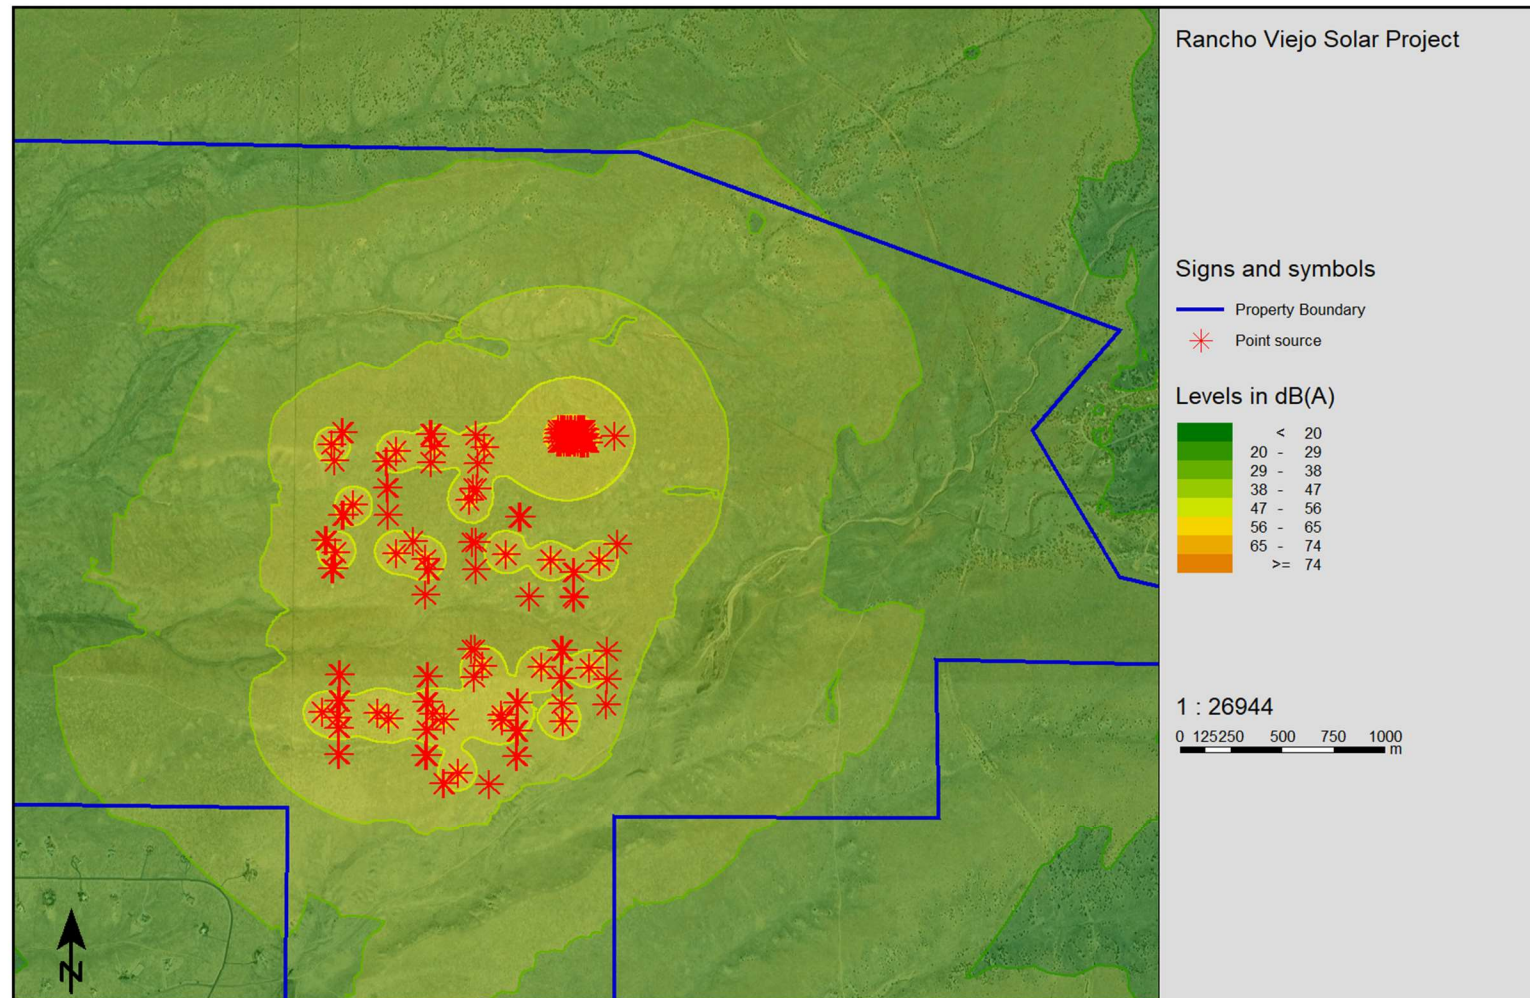


Figure A-1. Project operation noise isopleth



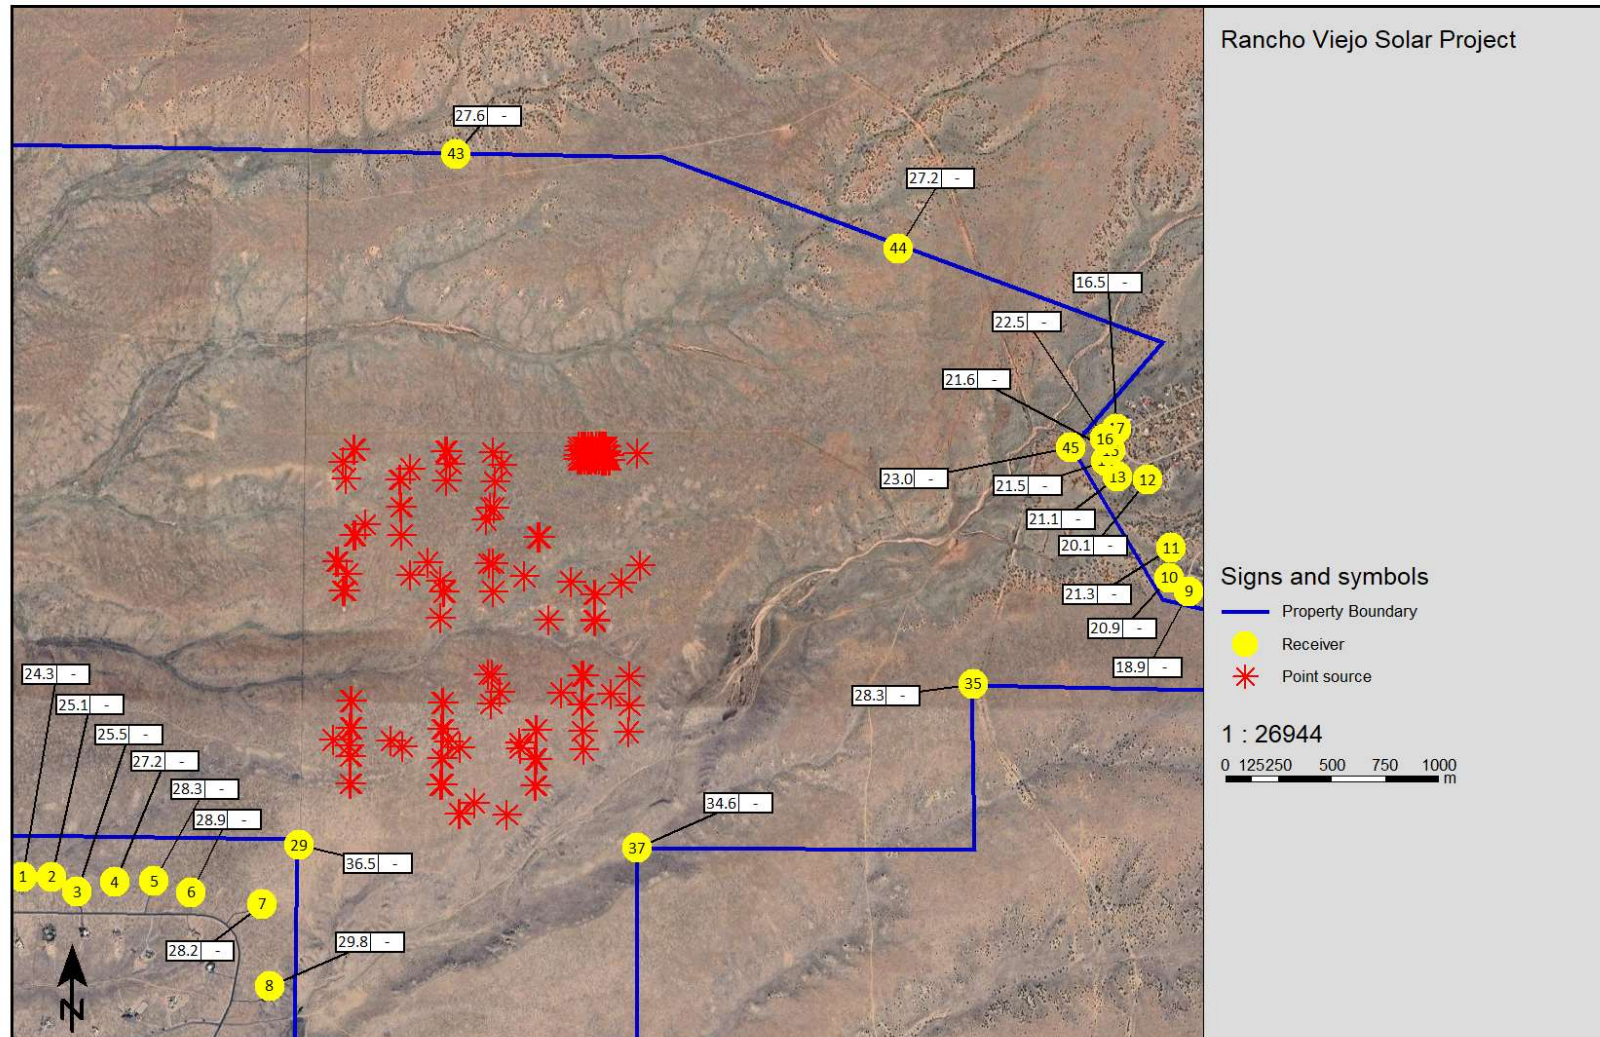


Figure A-2. Project operation noise single point map